

The Tiffany T80 Series

Full-Height Turnstiles
Interior & Exterior Application

T80S • T80T

The Tiffany T80S (single shown here) and the T80T (twin) are full security, tamper-resistant, full-height turnstiles. Both are equipped with Ovaline arms.



Security Across the Globe

For half a century, Sentronic International has been the trusted name in pedestrian control equipment. From our headquarters in Ohio, the company ships access solutions worldwide – whether your project requires full-height turnstiles, waist-high units, or matching ADA accessible gates we can provide the best available. Crafted in Aluminum or Stainless, our diverse product line offers state-of-the-art technology – from card readers to biometric scanning capability.

 Made in Ohio...
In-Service World-Wide

T80 Series (Single or Twin)

The T80S (single, shown above) and T80T (twin) are full security, tamper-resistant, full-height turnstiles. Both are equipped with Ovaline arms measuring 1/2" x 2" x 24".

T80S (Single)

Exterior Height: 89.5"

Width: 65.68"

Pedestrian Clearance: 30"

T80T (Tandem)

Exterior Height: 89.5"

Width: 96.18"

Pedestrian Clearance: 27"



Available as a Metal-Detect Door where higher security needs exist. Metal detection and bullet-resistant panels are available in varying performance specs based on your application.



SENTRONIC® International

P.O. Box 815 • Brunswick, OH 44212-0815 • Ph: 330.225.3029 • Fax: 330.225.3009 • Toll-Free Ph: 888.225.3029

E-mail: sales@sentronicinternational.com • www.sentronicinternational.com

The Tiffany T80 Series

Full-Height Turnstiles
Interior & Exterior Application

T80S • T80T

Applications:

The Tiffany T80 is a three-vane turnstile with a weather resistant finish and is ideal for interior or exterior placement – wherever style and durability are needed. It is crafted of 6005-T6 aluminum extrusions and features GE's transparent Lexan polycarbonate cage panels.

Product Features:

Materials and Finishes available in your choice of:

- Available in your choice of Clear, Dark Bronze or Black
- Performance features include automatic indent Feather-Touch action – that includes shock suppressor technology and a non-entrapment design

Design & Construction:

- Designed for secure operation with aesthetics in mind
- Features minimal exposed hardware and meets ASTM standards

Controller &

Access Control Operation:

- Self-centering control head with adjustable hydraulic shock suppression
- Hardened tool steel locking bars, cam and roller assemblies
- Permanently lubricated bearings
- All units are available in clockwise, counter-clockwise or bi-directional passage

Measures:

T80S (Single)

Exterior Height

89.5"

Width

65.68"

Pedestrian Clearance

30"

T80T (Tandem)

Exterior Height

89.5"

Width

96.18"

Pedestrian Clearance

27"

Options:

- Electronic locking module featuring heavy-duty 24 vdc pull-type industrial solenoids and card reader interface
- Available in Fail-Safe (open on power failure) or Fail-Lock (lock on power failure modes)
- Can interface with card readers, computer attendance systems, coin and token acceptors, push buttons, wireless remote controls and metal detectors
- Electronic 6 digit resettable counter with LCD display and ten-year lithium battery
- Vertical Graphic Array (VGA) red x / green arrow
- Additional options available on request

Matching Swing Gate available



(see model SGH36 Manual Passage Gate information)

Electrical Specifications:



Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

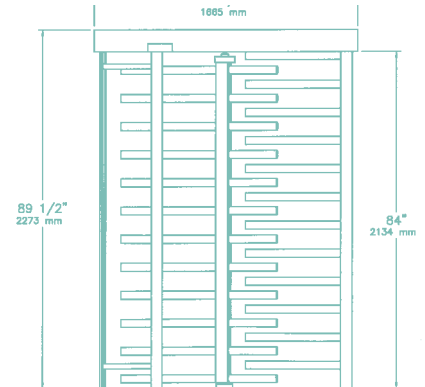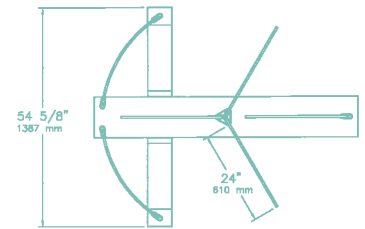

T80S

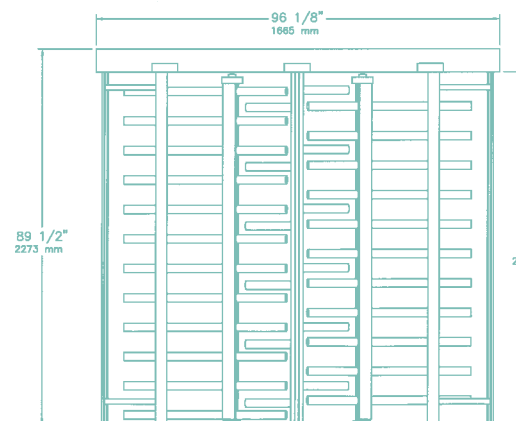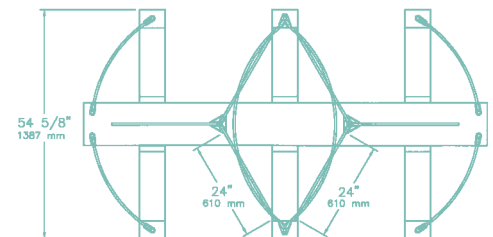

T80T



SENTRONIC® International

P.O. Box 815 • Brunswick, OH 44212-0815 • Ph: 330.225.3029 • Fax: 330.225.3009 • Toll-Free Ph: 888.225.3029
E-mail: sales@sentronicinternational.com • www.sentronicinternational.com